Beach Surveys and Data Assessment, Gold Coast Region

COPE Data - Southport Spit

Coastal Impacts Unit

February 2014



Prepared by

GHD Pty Ltd (Reference 4127255) on behalf of: Coastal Impacts Unit Science Delivery Division Department of Science, Information Technology, Innovation and the Arts PO Box 5078 Brisbane QLD 4001

© The State of Queensland (Department of Science, Information Technology, Innovation and the Arts) 2013

The Queensland Government supports and encourages the dissemination and exchange of its information. The copyright in this publication is licensed under a Creative Commons Attribution 3.0 Australia (CC BY) licence



Under this licence you are free, without having to seek permission from DSITIA, to use this publication in accordance with the licence terms.

You must keep intact the copyright notice and attribute the State of Queensland, Department of Science, Information Technology, Innovation and the Arts as the source of the publication.

For more information on this licence visit http://creativecommons.org/licenses/by/3.0/au/deed.en

Disclaimer

This document has been prepared with all due diligence and care, based on the best available information at the time of publication. The department holds no responsibility for any errors or omissions within this document. Any decisions made by other parties based on this document are solely the responsibility of those parties. Information contained in this document is from a number of sources and, as such, does not necessarily represent government or departmental policy.

If you need to access this document in a language other than English, please call the Translating and Interpreting Service (TIS National) on 131 450 and ask them to telephone Library Services on +61 7 3170 5725.

Contents

1.	lı	ntroduction	6
	1.1	Preamble	6
	1.2	The Program	7
	1.3	Site Selection	7
	1.4	Instrument	7
	1.5	Observers	8
	1.6	Accuracy	8
	1.7	Presentation of Data	8
2.	S	tation Particulars	9
	2.1	Location	9
	2.2	Observers	9
	2.3	Reports from Beach Conservation	9
	2.4	Site History	9
	2.5	Observed Parameters	10
	2.6	Tidal Information	11
	2.7	Beach Description	12
	2.8	Meteorological Events	13
	2.9	Station Supervision	13
3.	D)ata	. 14
	3.1	General	14
	3.2	Wind	14
	3.3	Waves	14
	3.4	Longshore Currents	15
	3.5	Beach Profile Parameters	15
	3.6	Monthly Beach Profiles	16
	3.7	Sand Sample Particle Size Distribution	16
4.	R	eferences	17
5.	Т	abular Results	. 18
6.	D	Pata Presentation	. 19
Δn	pend	lix A - COPE Instructions	. 45

List of tables

Table 1: Tidal Planes	. 11
Table 2: Sector Directions	. 14
Table 3: Monthly and annual – mean wave height/mean wave period and wave direction occurrences. Southport Spit. Year 1986	. 18
Table 4: Monthly and annual – mean wave height/mean wave period and wave direction occurrences. Southport Spit. Year 1987	. 18

List of figures

All figures are located in Section 6 Data Presentation

All ligu	res are located in dection o Data i resentation
1a	Site Plan
1b	Locality Plan
2a	COPE Recording Sheet – New Format, Page 1
2b	COPE Recording Sheet – New Format, Page 2
3	Wind Rose
4	Wave Height Percentage Exceedance
5	Percentage Occurrence of Wave Height and Wave Period
6	Wave Direction Analysis
7	Surf Zone Width – 1986
8	Surf Zone Width – 1987
9	Littoral Current Summary – 1986
10	Littoral Current Summary – 1987
11	Beach Profile Parameters – 1986
12	Beach Profile Parameters – 1987
13	Average Distance to Berm and Vegetation Line
14	Monthly Beach Profiles – 1986
15	Monthly Beach Profiles – 1987
16	Monthly Beach Profiles – 1988 – 1989
17	Monthly Beach Profiles – 1990 – 1991
18	Monthly Beach Profiles – 1992 – 1993
19	Monthly Beach Profiles – 1994 – 1995
20	Monthly Beach Profiles – 1996, 2010
21	Wave Heights and Cyclone Influence
22	Cyclone Tracks January 1986 – December 1987

List of photos

Photo 1: Southport Spit COPE Pole, August 1990	10
Photo 2a: Southport Spit, August 1990 – Looking north	12
Photo 2b: Southport Spit, August 1990 – Looking south	12

1. Introduction

1.1 Preamble

The Coastal Observation Program Engineering (COPE) data collection system was designed to collect data at selected sites along the Queensland coast to assist in the understanding of coastal processes and the way these processes affect the coast line. COPE was managed for the Beach Protection Authority (BPA) (now disbanded) by the Department of Harbours and Marine up until 1989 and then by the Coastal Management Branch in what is now the Department of Environment and Heritage Protection (DEHP). COPE data was progressively analysed and reports at selected sites were compiled up to mid 1996¹ when the program was abandoned. After that date very little further analysis was carried out, however all data was archived for possible future use. Guardianship of this data rests with the Coastal Impacts Unit of the Department of Science, Information Technology, Innovation and the Arts (DSITIA).

For this report, raw data was provided by DSITIA for Southport Spit – COPE Site 109. This data had not been pre-processed to identify errors in the recordings and/or errors from the transfer of the data from the recording sheets to the computer data file.

In December 2013, the Coastal Impacts Unit of DSITIA commissioned GHD to compile a report on the COPE data from the Southport Spit site, located just south of the Gold Coast Seaway rock wall. The report is modelled on the Mooloolaba 2 site report compiled in 2010 by GHD for the Sunshine Coast Regional Council (SCRC).

DSITIA provided the following data:

- Recorded raw data in the form of a text file this was data compiled directly from the recording sheets;
- Sieve data from the analysis of the sand samples collected by the observers at the site;
- 3. Beach profile data collected by the observers at the site and subsequent data collected by staff from DSITIA at Deagon; and
- 4. Photographs and other relevant information about the Southport Spit COPE Station extracted from the BPA files.

GHD, through its Principal Coastal Engineer, Paul O'Keeffe, a former engineer to the BPA, was able to source other background information on the COPE program and make assessments of the data analysis based on first-hand experience with the COPE program.

In addition, the BPA's Beach Conservation newsletters were reviewed for any articles on the COPE program relating to the Southport Spit site. However, no articles specific to Southport Spit were identified.

Page 6 of 49

¹ This date concurs with the recollection of Paul O'Keeffe (GHD) and Sel Sultmann (DEHP), Coastal Engineer and Dune Conservationist respectively for the BPA at the time that the COPE program was finalised.

Reference documents and technical papers that have been used to assist in the preparation of this report are listed in Section 4 and include the Mooloolaba 2 report compiled in 2010 by GHD for the Sunshine Coast Regional Council (SCRC).

1.2 **The Program**

The BPA required basic data on the behaviour of Queensland's beaches in order to provide evidence based coastal management advice to Local Authorities. The COPE project aimed to collect information on wind, waves and beach behaviour in areas where extensive investigations were not practical and where otherwise little or no data existed.

The project was based on the recruitment of volunteer observers who were prepared to record a series of basic parameters daily for at least a three year period. The COPE project was operational from late in 1971 to about mid-1996².

1.3 Site Selection

In selecting a site for a COPE station, consideration was given to:

- 1. The general shoreline configuration and the possibility of extrapolation of data to other adjacent beaches;
- 2. The distribution of stations along Queensland's coastline; and
- 3. The need to correlate the COPE data with planned or existing data collection programs.

1.4 Instrument

The COPE observers were supplied with a basic kit of recording instruments including:

- 30 m tape measure;
- Wind meter;
- Stop watch;
- 2.0 m measuring sticks;
- Recording forms;
- Fluorescent dye;
- 1.5 m support stick (as suggested by Instructions for filling out COPE recording form);
 and
- Hand level (as suggested by Instructions for filling out COPE recording form)

A graduated reference pole was usually installed on the beach to serve as the base point for all measurements in plan and the control for vertical levelling.

٠

² Refer previous footnote

1.5 **Observers**

The majority of COPE observers were volunteers. . Some stations were also operated by Government and Local Authority employees who carried out the observations as part of their official duties.

1.6 **Accuracy**

Individual observers differed in their subjective assessment of the various parameters recorded as part of the COPE program. Wave parameters such as height, and angle of approach together with surf zone width and the location of vegetation line all required visual assessment. The accuracy of recorded details varied from observer to observer and possibly from recording to recording. Although the BPA was confident that all observers made their observations to the best of their ability and accepted these observations without adjustment, the existence of random and non-random errors in the recorded data was to be expected.

Problems associated with the use of data containing these errors are minimised in a number of ways as follows:

- Regular visits were made to the COPE stations by the BPA's COPE Field Officer to provide a check on any bias introduced into the recordings by incorrect observation procedures.
- 2. It was determined that, with a large number of observations taken on a regular basis, a reasonable assessment can be made of the average values of the observed parameters provided the observation errors are random. A minimum recording period of three years was adopted for the analysis and publication of the data, in order to minimise the effects of random errors.
- 3. Five day moving averages are applied to observations of the various beach width and foreshore slope parameters to filter out random errors.
- 4. Pre-processing of the raw data was undertaken to remove obvious errors from either recording errors and/or or errors from the transfer of the data from the recording sheets to the computer data file. For this report, these errors and how they were corrected have been documented in the Data Presentation section.

For these reasons, the BPA concluded that published COPE data can be used with confidence provided the above inherent limitations are recognised.

1.7 Presentation of Data

The purpose of this report is to present COPE data for Southport Spit for the two year period 1986 to 1987, and the continued profile data supplied by DSITIA from 1987 – 2010 in a useful statistical form.

The two year period is short of the three year minimum period that was considered to be representative of the long term average meteorological condition. Therefore, the statistics presented on wind, wave and beach movements should be used with caution in terms of being representative of typical ambient conditions at this site. In addition, this recording period is too short to be representative in terms of the average occurrence of extreme events such as cyclones and floods, and this should be taken into account when consideration is given to the influence of such events on trends of long term beach behaviour.

2. Station Particulars

2.1 Location

Southport Spit is located on the Gold Coast and is situated approximately 70 km south of Brisbane on the South East Queensland coastline. The beach is approximately 4 km long extending from south of the Gold Coast Seaway rock wall to Surfers Paradise. The location of the Southport Spit COPE station is just south of the Gold Coast Sand Pumping Jetty, as shown on Figure 1a and 1b.

2.2 **Observers**

From information available from the BPA file for this station, the observers for the Southport Spit site were staff from the Gold Coast Waterways Authority (GCWA), Russell Ratcliffe³ and Sid Mackenzie. The retirement of the program was due to the busy schedules of the GCWA staff members.

2.3 Reports from Beach Conservation

Beach Conservation was the title of the newsletter of the Beach Protection Authority of Queensland and was published quarterly between September 1970 and June 1990. Various aspects of the COPE program were frequently featured in the newsletter including two main articles on the operation of the program in April 1977 (Issue No 27) and June 1990 (Issue No 69). However, there were no specific articles about the Southport Spit station.

2.4 **Site History**

Listed below is information compiled from the BPA files for this site, including details of the installation and maintenance of the COPE pole.

- 9 January 1986 Observations commenced;
- 14 April 1986 COPE pole installed;
- 1 May 1986 COPE pole surveyed; and
- 31 March 1987 Observations ceased.

³ Extracted from written notes by BPA COPE Field Officer in BPA file – spelling of surname may not be correct.

Photo 1: Southport Spit COPE Pole, August 1990



2.5 **Observed Parameters**

The observers at this station recorded the majority of observations in the morning between 6am and 9am with some recordings performed at other stages during the day. Data was recorded on the new format recording sheet shown in Figure 2a, with the following parameters being observed:

- Wave height (average) (m);
- Wave height (maximum) (m);
- Wave height method;
- Wave period (s);
- Wave direction (degrees);
- Surf zone width (s);
- Longshore current speed (m/min);
- Longshore current direction;
- Distance from shore (m);
- Presence of offshore bar;
- Wind speed (mph);
- Wind direction (degrees);
- Fixed contour elevation (m);
- Distance to fixed contour (m);
- Distance to vegetation line (m);
- Sand level at COPE reference pole (m); and
- Sand sample.

Surf zone width was measured as the time (in seconds) it took for a wave to transgress the surf zone from its break point until its final run-up position.

All directions in this report are magnetic. Sector bearings derived from True North were converted to magnetic bearings using the magnetic variation shown on marine charts.

The first recorded sand sample was taken in July 1986, and from then on, samples seemed to be taken randomly until March 1994.

A profile of the beach was recorded at least monthly throughout the recording period with additional profiles recorded within the month depending on the state of the beach and the occurrence of storm events. In addition, staff from DSITIA recorded beach profiles at the COPE site periodically from 1996 to 2010.

2.6 Tidal Information

Tidal information from the 1993 Official Tide Tables (DoT 1993) for Snapper Rocks (Coolangatta) is presented in Table 1. The levels have been adjusted to a Lowest Astronomical Tide (LAT) datum of zero.

It should be noted that in 2010, the tidal plane levels were updated for the current Tidal Datum Epoch 1992 - 2011, using the latest available tidal observations, prediction information and allowance for sea level rise. The current tidal plane levels are provided in the 2013 Official Tide Tables (MSQ 2013) and the levels for Snapper Rocks (Coolangatta) are presented in Table 1. The datum is LAT.

Table 1: Tidal Planes

Tidal Plane	1993 (m LAT)	2013 (m LAT)
Highest Astronomical Tide (HAT)	2.09	2.11
Mean High Water Springs (MHWS)	1.63	1.64
Mean High Water Neaps (MHWN)	1.34	1.32
Australian Height Datum (AHD)	0.98	0.98
Mean Sea Level (MSL)	0.97	0.97
Mean Low Water Neaps (MLWN)	0.61	0.49
Mean Low Water Springs (MLWS)	0.31	0.20

The tidal plane levels have changed slightly, however, the value of the AHD relative to the tidal planes has remained constant.

2.7 **Beach Description**

The beach at the Southport Spit COPE station exhibited the following characteristics:


- Typical beach slopes: Foreshore slope can be inferred from the beach width measurements and the monthly profiles. The beach slope oscillated between 1 to 7 degrees, with an average of 3 degrees (by inspection of Figure 14 to Figure 20);
- Beach width: Varied from 25 to 150 m measured from the seaward toe of the frontal dune to the Low Water Mark over the 10 year period (1984 - 1993) (by inspection of the monthly beach profiles Figure 14 to Figure 20);
- D₅₀ grain size: 0.28 mm averaged over 7 samples collected over the nine years (1986 1994); and
- Adjoining landform: Extensive vegetated sand dunes

Images of the beach are provided in Photos 2a and 2b.

Photo 2a: Southport Spit, August 1990 - Looking north



Photo 2b: Southport Spit, August 1990 - Looking south

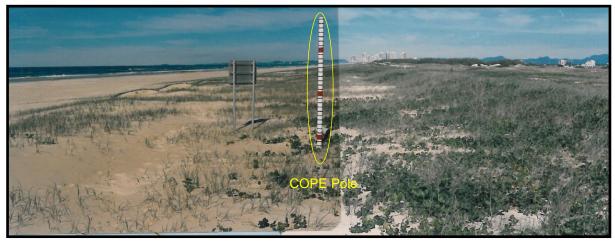

2.8 Meteorological Events

The following cyclones were recorded by the Brisbane Bureau of Meteorology as having tracks within 400 km of Southport Spit between January 1986 and December 2006. It is considered that these meteorological events may have had some effect on the condition of Southport Spit.

- Cyclone NANCY: 28 January 8 February 1990;
- Cyclone DAMAN: 15 18 February 1992;
- Cyclone FRAN: 5 16 March 1992;
- Cyclone REWA: 28 December 1993 21 January 1994;
- Cyclone VIOLET: 3 6 March 1995;
- Cyclone GERTIE: 17 22 December 1995; and
- Cyclone KERRY: 8 18 January 2005.

Cyclones that also occurred outside the 400 km radius to Southport Spit were Cyclone ROGER, 12-21 March 1993, Cyclone BETSY 10-14 January 1992, Cyclone YALI 17-27 March 1998 and Cyclone HAMISH 5-12 March 2009. See Figure 22 for the cyclone tracks for a 400 km radius centred just east of Southport Spit over the recording period of 1986 – 2006. More recent records were unavailable for plotting in this format at the time of compiling the report.

2.9 Station Supervision

The observers were instructed in the recording program by the BPA COPE Field Officer and the initial instruction period was followed by regular visits to the station during the period of recordings presented in this report.

Installation of the reference pole for this station was carried out by the GCCC. Maintenance of the pole was carried out by the BPA COPE Field Officer.

3. Data

3.1 General

COPE data for this station for the two year period January 1986 to March 1987 is presented in the tables in Section 5 Tabular Results and the figures in Section 6 Data Presentation. The data has been analysed statistically and/or smoothed to reveal long term averages or trends. A brief description of each of the observed parameters is given below with the relevant figure references.

3.2 **Wind**

The observer recorded the wind speed at the beach using a hand held wind meter at 1.5 m above beach level. Wind direction was recorded in degrees by compass, and the speed was recorded in miles per hour (mph). Wind speed data in this report is presented in metres per second (m/s).

A summary of annual wind speed direction percentage occurrences is shown as a wind rose in Figure 3.

3.3 Waves

The average and maximum breaker height (trough to crest) was usually estimated to the nearest 0.1 metre. Previous studies (Patterson and Blair, 1983) have shown that the estimate of average breaker height is comparable with the equivalent deep water significant wave height. The wave height was measured using one of the methods described on page two of the new format recording sheet (Figure 2b), the method chosen being dependent on the wave height.


The observers estimated the wave period by recording the time taken for eleven wave crests (the duration of 10 waves) to pass a point.

Wave direction was recorded as a compass bearing (refer Figure 2b). The direction recorded was then converted to a sector, as shown in the following paragraph.

Wave direction is estimated as one of five direction sectors in relation to the shore normal direction from which the waves were approaching the beach. The compass bearings for the sectors are displayed in Table 2 and in the diagram below:

Table 2: Sector Directions

Sector	Direction					
1	349° to 48°					
2	49° to 73°					
3	74° to 84°					
4	85° to 109°					
5	110° to 169°					

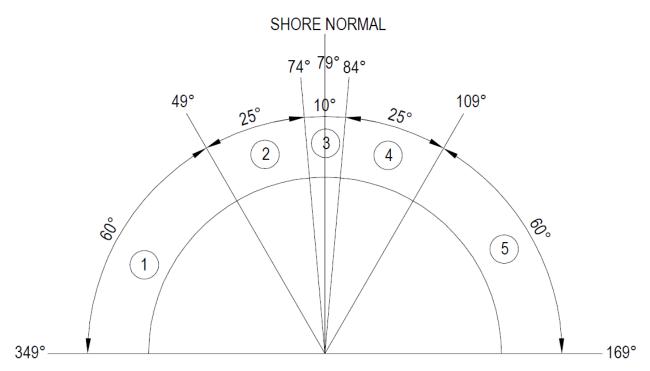

Note: At the Southport Spit COPE station, the shore normal direction is approximately 79 degrees east of magnetic north.

Statistical representations of the observed wave data include:

- The percentage of wave height recordings which exceed any given wave height for all directions combined (Figure 4);
- The percentage occurrence of various combinations of wave heights, periods and directions (Figure 5 and Figure 6);
- Surf zone width with an indication of existence or otherwise of an offshore bar (Figure 7 and Figure 8); and
- Tabulation of the occurrence of various wave heights, periods, types and directions (Table 3 and Table 4).

3.4 **Longshore Currents**

The observer measured the distance parallel to the shoreline that a float or dye patch in the surf zone moved in one minute. Current direction is either upcoast (positive) or downcoast (negative), with the upcoast direction being to the left when facing the sea from the beach.

The readings were then converted to a velocity which was plotted on a daily basis (Figure 9 to Figure 10). A summary table for the mean upcoast and downcoast components and overall annual averages are provided on each of these yearly figures.

3.5 **Beach Profile Parameters**

Fixed contour elevation was measured by using the supplied level and the 1.5 m support pole. The observer would stand the pole in the top of the berm, and by using the level, would site and record the elevation from the graduated COPE pole. The distance to the fixed contour was recorded using a tape measure. The fixed contour has been interpreted as being on top of a berm.

Sand level at the reference pole and the distance to the vegetation line were also recorded.

Changes in these parameters with time indicate how the beach moves in response to varying wave conditions. Plots of these parameters are shown in Figure 11 and Figure 12.

Figure 13 shows a summary of monthly averages of the distance to berm and the distance to vegetation line for the full recording period.

3.6 **Monthly Beach Profiles**

Measurements of beach profiles were usually taken monthly. However, if the beach experienced appreciable erosion or accretion during the month, the observer was requested to take an additional beach profile. Monthly beach profiles are shown in Figure 14 to Figure 19. Further profiles are also available in Figure 20. These profiles were not recorded as part of the COPE data collection program, but were recorded by staff from DSITIA. It should be noted that the profile taken on 1 May 1986 has been repeated in each graph so comparisons between profiles can be easily made.

3.7 Sand Sample Particle Size Distribution

A total of 7 sand samples were collected over the nine years (1986 – 1994) when the station was operational. The data indicates that each sample underwent a standard sieve analysis to determine the particle size distribution and the average D_{50} size of 0.28 mm was derived from the data.

4. References

- BC No 27 Jones, C.M., COPE (Coastal Observation Programme Engineering), Beach Conservation newsletter No 21, October 1975.
- 2. BC No 69 Andrews, M.J. and Blair, R.J., *Coastal Observation Programme Engineering (COPE)*, Beach Conservation newsletter No. 69, June 1990.
- 3. DoT 1993 1993 Official Tide Tables, Queensland Department of Transport, 1993.
- 4. Mooloolaba 2 COPE Report 2010 GHD Pty Ltd, *COPE Data Mooloolaba 2*, for Sunshine Coast Regional Council, August 2010.
- 5. MSQ 2013 2013 Official Tide Tables, Maritime Safety Queensland, 2013.
- 6. Patterson & Blair 1983 Patterson, D.C. and Blair, R.J., *Visually Determined Wave Parameters*, 6th Australian Conference on Coastal and Ocean Engineering, Gold Coast, July 1983.
- 7. Robinson & Jones 1977 Robinson, D.A. and Jones, C.M., *Queensland Volunteer Coastal Observation Programme Engineering (COPE)*, 3rd Australian Conference on Coastal and Ocean Engineering, Melbourne, April 1977.

5. Tabular Results

Table 3: Monthly and annual – mean wave height/mean wave period and wave direction occurrences. Southport Spit. Year 1986

		Mean	Mean	Percentage occurrences - w ave direction (sector)										
Month	No. observations	w ave period (s)	w ave height (m)	No of Obs.	1	2	3	4	5	Calm				
Jan	20	5.8	0.9	20	0.0	5.0	35.0	60.0	0.0	0.0				
Feb	7	5.5	0.5	7	0.0	0.0	57.1	42.9	0.0	0.0				
Mar	28	6.2	1.5	28	0.0	32.1	28.6	35.7	3.6	0.0				
Apr	25	5.9	1.4	25	0.0	8.0	52.0	40.0	0.0	0.0				
May	19	6.15	1.20	19	0.0	0.0	21.1	78.9	0.0	0.0				
Jun	17	5.8	1.4	17	0.0	0.0	35.3	64.7	0.0	0.0				
Jul	19	5.5	1.0	19	0.0	10.5	52.6	36.8	0.0	0.0				
Aug	19	5.4	0.9	19	0.0	5.3	31.6	63.2	0.0	0.0				
Sep	19	4.7	0.7	19	0.0	5.3	26.3	68.4	0.0	0.0				
Oct	20	4.7	0.5	20	0.0	45.0	5.0	50.0	0.0	0.0				
Nov	8	4.8	0.5	8	0.0	25.0	0.0	75.0	0.0	0.0				
Dec	3	4.9	0.9	3	0.0	0.0	0.0	100.0	0.0	0.0				
Whole Year	204	5.4	1.0	204	0.0	13.2	31.4	54.9	0.5	0.0				

Table 4: Monthly and annual – mean wave height/mean wave period and wave direction occurrences. Southport Spit. Year 1987

		Mean	Mean		Percentag	e occurre	nces - w a	ve direction	on (sector)	
Month	No. observations	w ave period (s)	w ave height (m)	No of Obs.	1	2	3	4	5	Calm
Jan	3	4.3	0.8	3	0.0	66.7	0.0	33.3	0.0	0.0
Feb	8	4.7	1.0	8	0.0	25.0	0.0	75.0	0.0	0.0
Mar	9	4.6	0.9	9	0.0	0.0	0.0	100.0	0.0	0.0
Apr				Recording ceased						
May										
Jun										
Jul										
Aug										
Sep										
Oct										
Nov										
Dec										
Whole Year	20	4.5	0.9	20	0.0	20.0	0.0	80.0	0.0	0.0

6. Data Presentation


The data analysis for Southport Spit COPE station is presented in the following figures.



G:\41\27255\GIS\Maps\MXD\41_27255_006_TheSpit_SitePlan_rev_a.mxd

Site Plan

Figure 1a

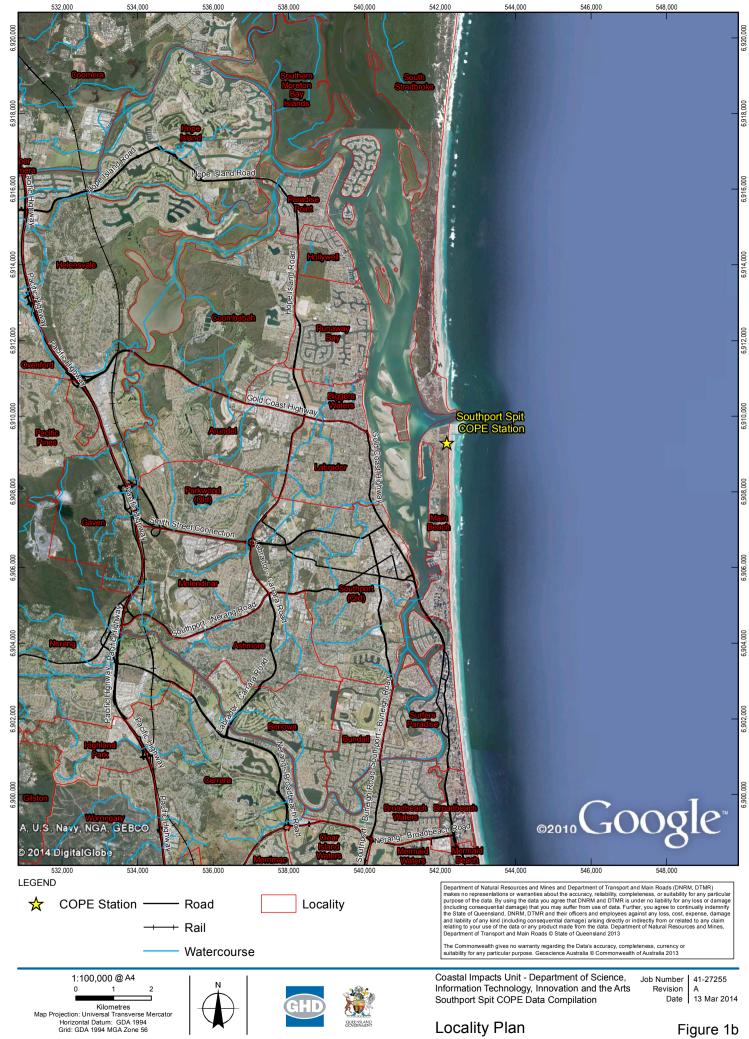

		BEACH	PROT	ECTIO	N A	UTHO	RIT	ΥO	F QU	EE	VSL/	ND				Form Mo	. BE 4E
10		COA	STAL O	BSERVA	TION	I PROG	RAI	MME	- ENG	SINE	ERIN	G	6	^	0		
1	7	REC	ORD A	II DA	TA (CARE	E111	ıv	AMD	150	21121	v	,	U	<u> </u>		2.00
	SITE NUMB			AY	-	ONTH		all report to the			JIDL	*			-	TIME	
1 2 3 4 5 6 7 8								NTH YEAR TIME 9 10 11 12 13 14 1							15		
					Ĺ						us	cord ing 24 stem	time 4 hour				
(i)	WAVE HEIGHT (16	47		-		HEIG				-		4	0	10
	Record the best es breaking wave heigh of a metre. If less thand go directly to So	nt to the neares than 0.1 record	t tenth]	Record the best estimate of the maximum breaking wave height during the entire observation period to the nearest tenth of a metre.										
	WAVE HEIGHT IN Record the method to Record 1 if visual es Record 2 if measure Record 3 if measure	hat you used to o timate d with COPE stic		e height.	20]	WAVE PERIOD Record the time in seconds for eleven (11) wave crests to pass a stationary point just seaward of the surf zone.							23			
	WAVE DIRECTION Determine the direct entering the surf zo provided and reco	tion that the way	ompass	24 2	5 26	1	Re	cord erage	ZONE the time height	e in :	second raverse	the	surf 2	one	2	7 28	29
	degrees.	ord the direct	ion in			1		m br ach.	eak po	int to	final	run-ı	up on	the	_		
(ii)	CURRENT SPEE	D					CI	URR	ENT D	IREC	TION						
	Measure in metres the the dye patch is obser (1) minute period; if record 000.	ved to move durin	ng a one	30 3	32]	When the observer faces the sea 0 — no long shore movement L — dye moves to the left R — dye moves to the right							33			
	DISTANCE FROM			34	35		Ó	FFSI	HORE	BAF							36_
	Record the distance shore to where the were commenced.						Is an off-shore bar causing the waves to break? 1—yes 0—no										
(iii)	WIND SPEED			37	38				DIREC						3	9 40	41
	Record wind speed calm record 00 and go]	Determine the direction that the wind is coming from using the compass provided and record the direction in degrees.										
(iv)	FIXED CONTOUR	ELEVATION					DI	DISTANCE TO FIXED CONTOUR									
	Record the elevation of	of the fixed contoi	ur.	42	43]	Record the distance, to the nearest metre, from the reference post to the fixed contour. Distances landward of the reference post are negative. e.g. 009 measures 9 metres seaward (No sign); —07 measures 7 metres landward. (Minus sign)						46				
(v)	DISTANCE TO T			47 48	40		SA	AND	LEVE	L AT	POL	=				^	#1
	Record the distance fi the average vegetation of the reference post a	n line. Distances la		4, 4,]	Re	cord	to neare	est te	nth of a	. metr	е.				51
(vi)	SAND SAMPLE	PLEASE PRIN	Ī			Pleas	e che	ock th	e form f	for co	mplete	ness					
	If sample taken then record 1. Otherwise leave blank.			SITE NA	ME				_					OBSE	RVER		
	52	REMARKS:_															
		1000 0441		Make	any ac	Iditional i	remar	ks, co	omputat	ions o	or sketo	ches o	on the r	revers	se side	of thi	s form.
		53 54 55 5		59 60	31_62	63 64	65	66	67 68	69	70 71	72	73 74	75	76 7	7 78	79 80





Job Number | 41-27255 Revision | A Date | 23 Jan 2014

Figure 2a

COPE Recording Sheet – New Format, Page 1

WAVE HEIGHT AND DIRECTION INSTRUCTIONS METHOD 1 VISUAL ESTIMATION This method should only be used where the waveheights are below 0.5 and it is not practicable to use the preferred Method 2. METHOD 2 breaking wave HEIGHTS FROM 0.5-1.5m sight to horizon Н middle of wave run-up and run-back on beach extension if necessary HEIGHTS FROM 1.5-3.0m breaking wave sight to horizon graduated stick inserted into sand spike at the mid-point of the wave run-up and run-back on the beach. METHOD 3 FOR WAVES OVER 3m offshore breaking wave obtain COPE pole level sight to horizon dune SWASh-Zone water level WAVE DIRECTION MEASUREMENT **OCEAN** breaking wave BEACH Observerd Job Number 41-27255




Coastal Impacts Unit - Department of Science, Information Technology, Innovation and the Arts Southport Spit COPE Data Compilation bb Number | 41-27255 Revision | A Date | 23 Jan 2014

Figure 2b

COPE Recording Sheet - New Format, Page 2

Wind Data - All Observations Figure 3 Southport Spit: January 1986 - March 1987

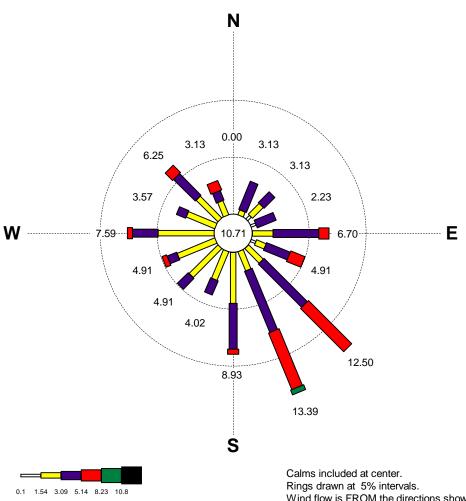


Wind Speed (Meters Per Second)

Wind flow is FROM the directions shown. No observations were missing.

PERCENT OCCURRENCE: Wind Speed (Meters Per Second)												
LOWER BOUND OF CATEGORY												
DIR	0.1	1.54	3.09	5.14	8.23	10.8						
N	0.00	0.00	0.00	0.00	0.00	0.00						
NNE	0.00	0.45	2.68	0.00	0.00	0.00						
NE	0.45	1.34	1.34	0.00	0.00	0.00						
ENE	0.45	0.00	1.79	0.00	0.00	0.00						
E	0.00	1.79	4.02	0.89	0.00	0.00						
ESE	0.45	0.89	2.23	1.34	0.00	0.00						
SE	0.00	1.79	5.36	5.36	0.00	0.00						
SSE	0.00	1.79	5.80	5.36	0.45	0.00						
TOTAL OBS = 224 MISSING OBS = 0												


PERCENT OCCURRENCE: Wind Speed (Meters Per Second)											
LOWER BOUND OF CATEGORY											
DIR	0.1	<u>1.54</u>	3.09	<u>5.14</u>	8.23	10.8					
S	0.00	4.46	4.02	0.45	0.00	0.00					
SSW	0.00	2.68	1.34	0.00	0.00	0.00					
SW	0.00	3.57	1.34	0.00	0.00	0.00					
WSW	0.00	3.57	0.89	0.45	0.00	0.00					
W	0.00	4.91	2.23	0.45	0.00	0.00					
WNW	0.00	2.68	0.89	0.00	0.00	0.00					
NW	0.00	2.68	2.68	0.89	0.00	0.00					
NNW	0.00	1.34	0.89	0.89	0.00	0.00					
CALM OBS = 24 PERCENT CALM = 10.71											

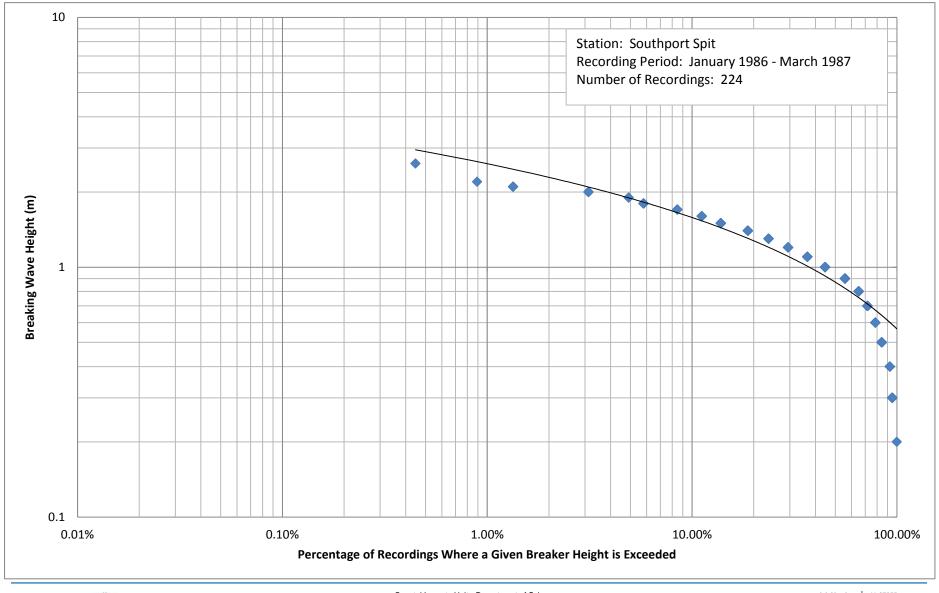




Wave Height Percentage Exceedance

Job Number | 41-27255 Revision | A Date | 23 Jan 2014

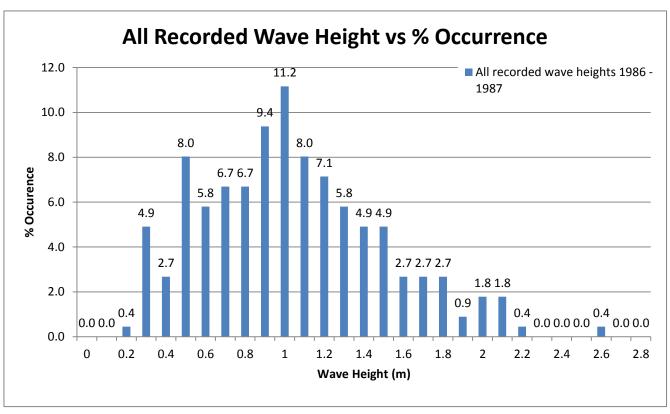

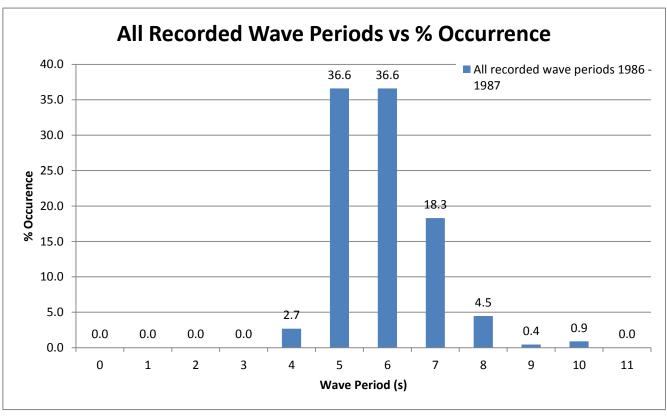






bb Number | 41-27255 Revision | A Date | 23 Jan 2014

Figure 5

Percentage Occurrence of Wave Height and Wave Period

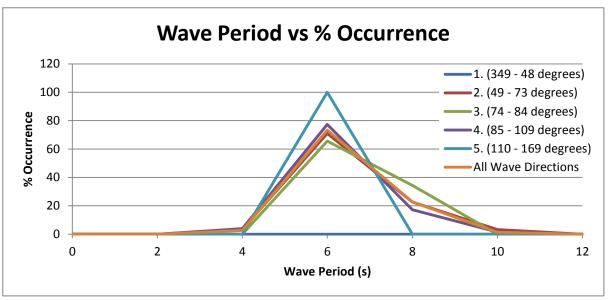


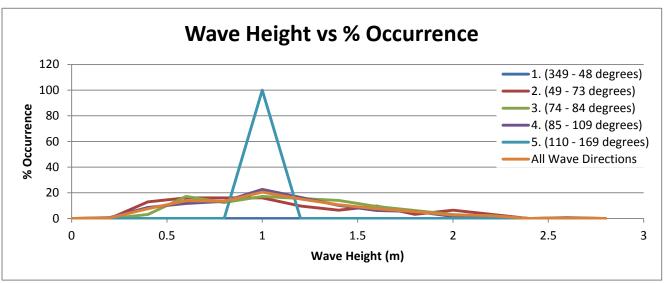

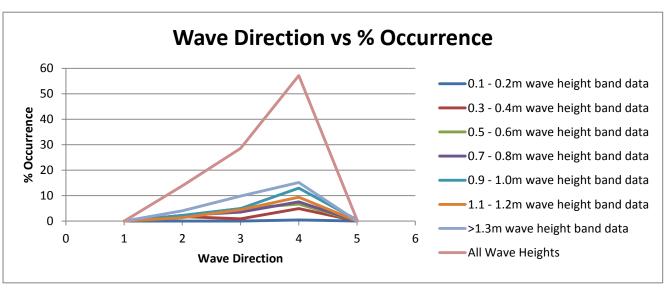




Job Number | 41-27255 Revision | A Date | 23 Jan 2014

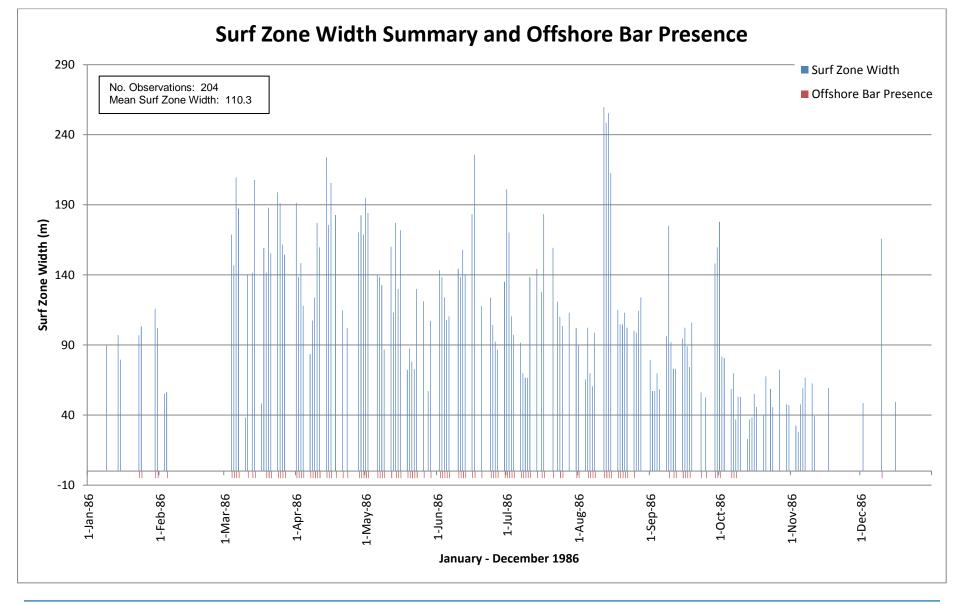




Surf Zone Width - 1986

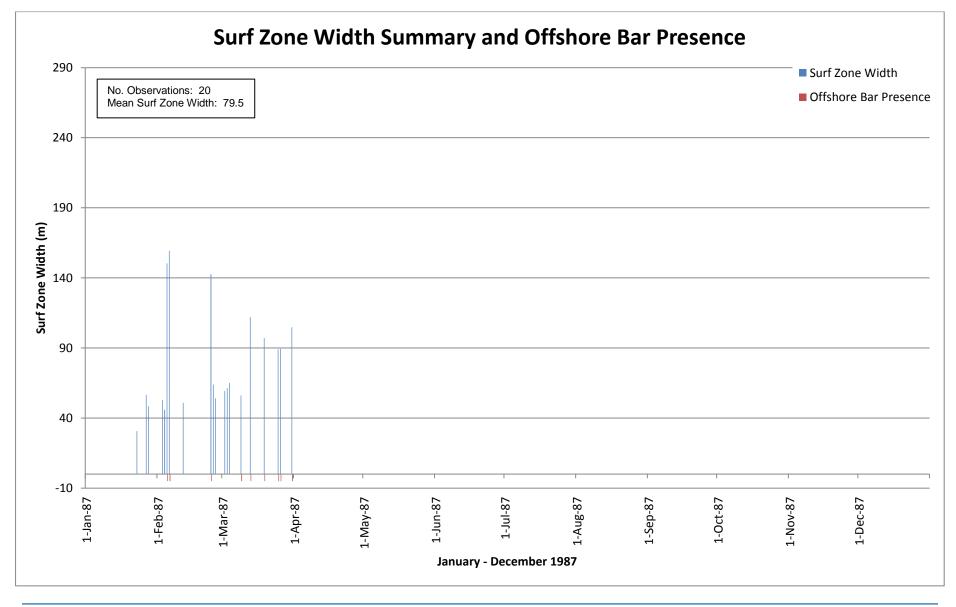



Surf Zone Width - 1987


Job Number | 41-27255 Revision | A Date | 23 Jan 2014

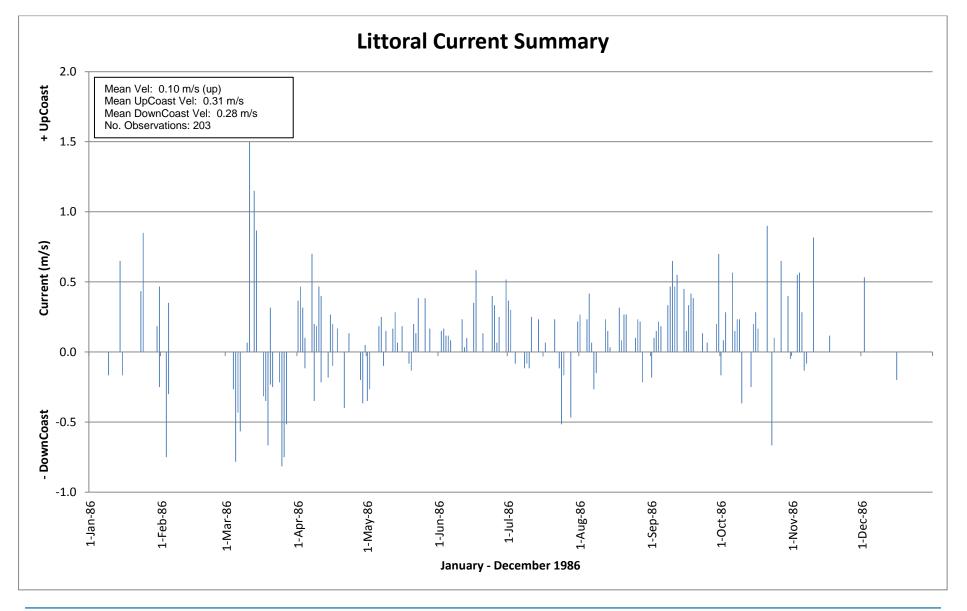



Littoral Current Summary – 1986


Job Number | 41-27255 Revision | A Date | 23 Jan 2014

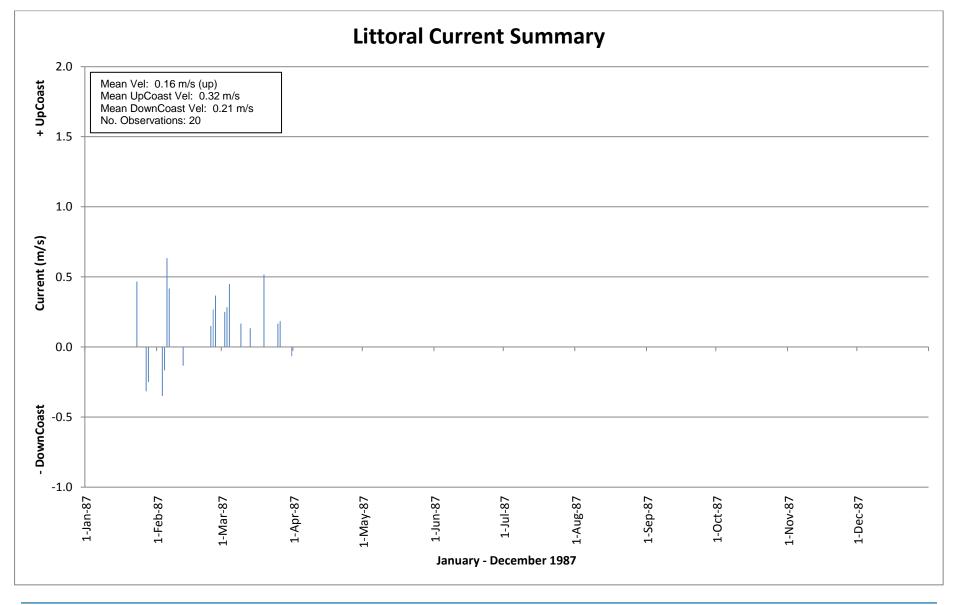



Littoral Current Summary – 1987


Job Number | 41-27255 Revision | A Date | 23 Jan 2014

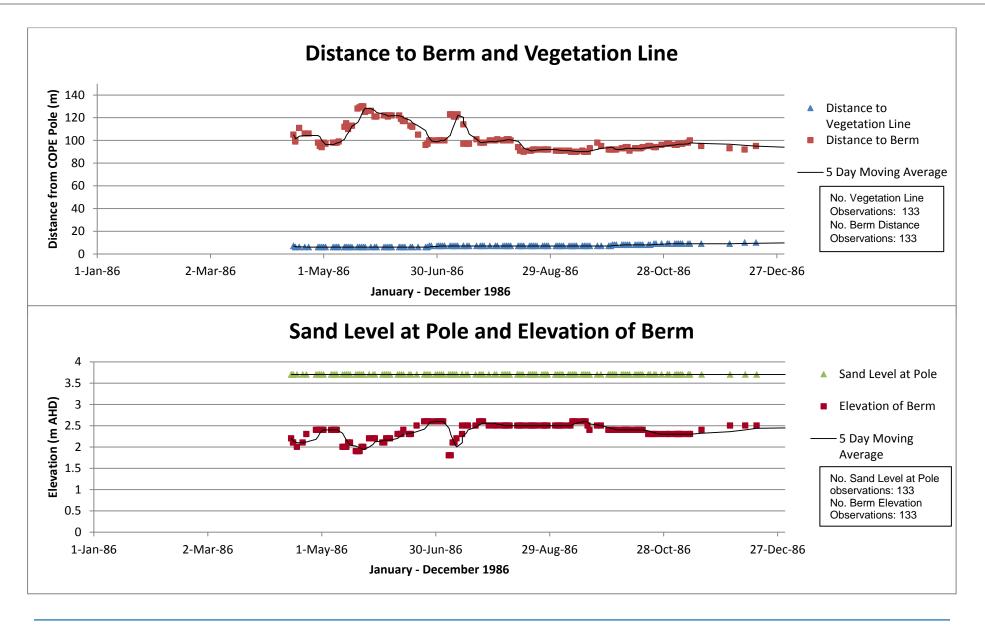



Beach Profile Parameters – 1986


b Number | 41-27255 Revision | A Date | 23 Jan 2014

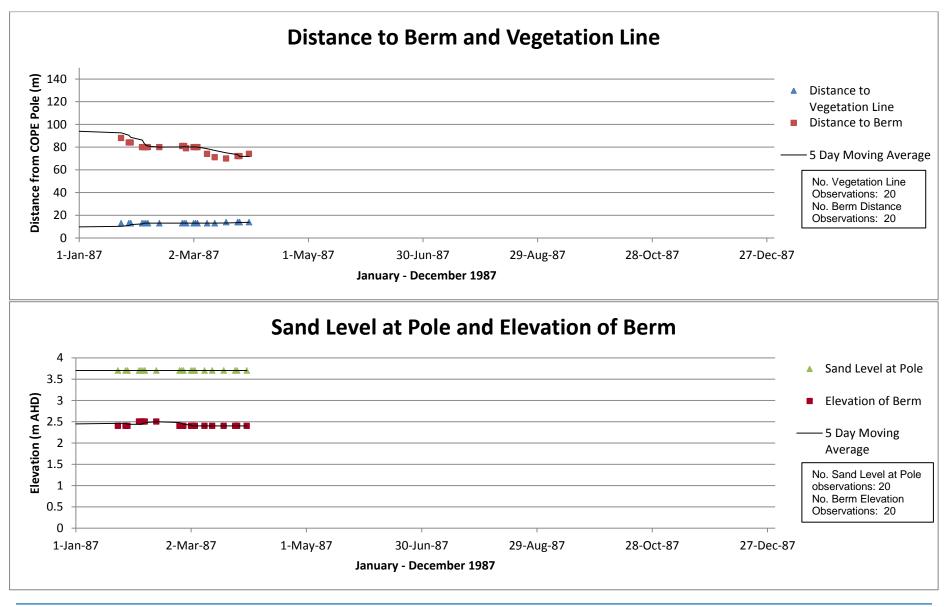



Beach Profile Parameters – 1987

ob Number | 41-27255 Revision | A Date | 23 Jan 2014

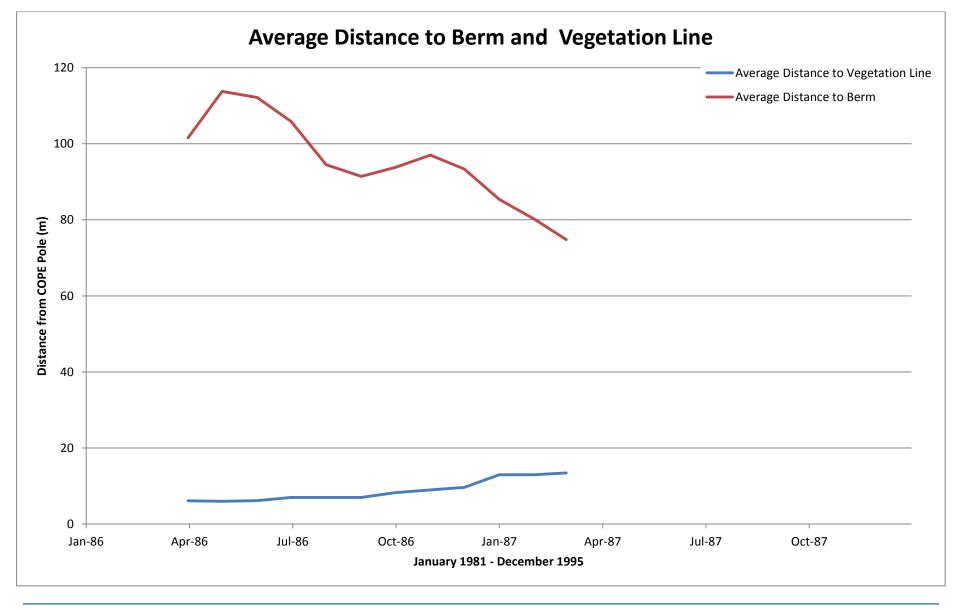




Average Distance to Berm and Vegetation Line


 Job Number
 41-27255

 Revision
 A


 Date
 23 Jan 2014

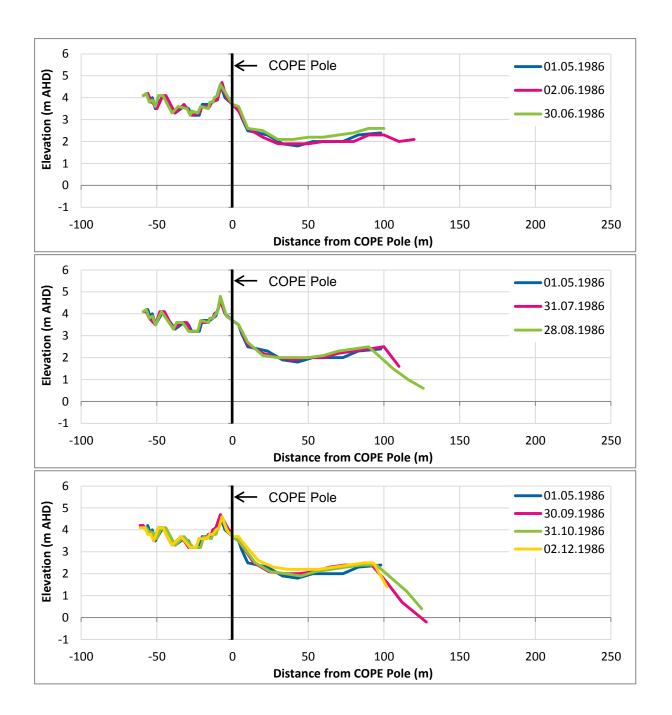






Job Number | 41-27255 Revision | A Date | 21 Jan 2014

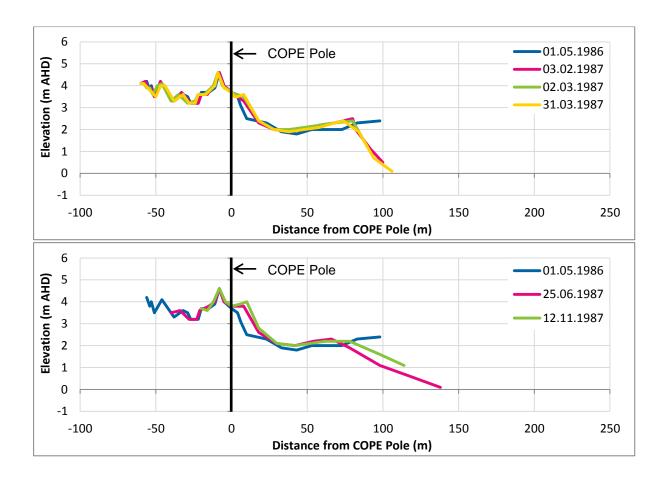




Job Number | 41-27255 Revision | A Date | 21 Jan 2014

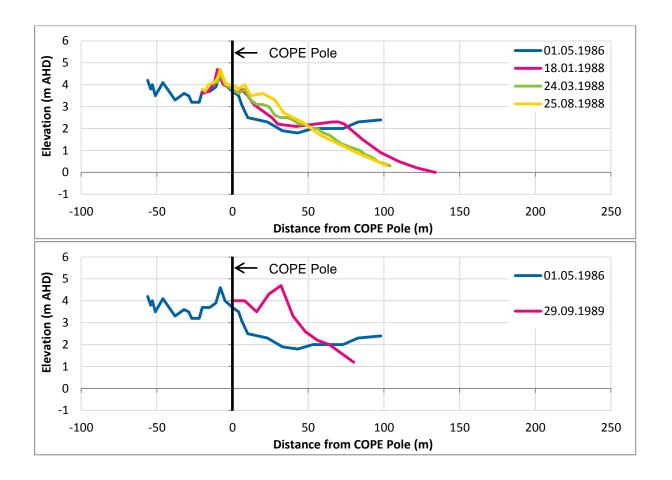





Job Number | 41-27255 Revision | A Date | 21 Jan 2014

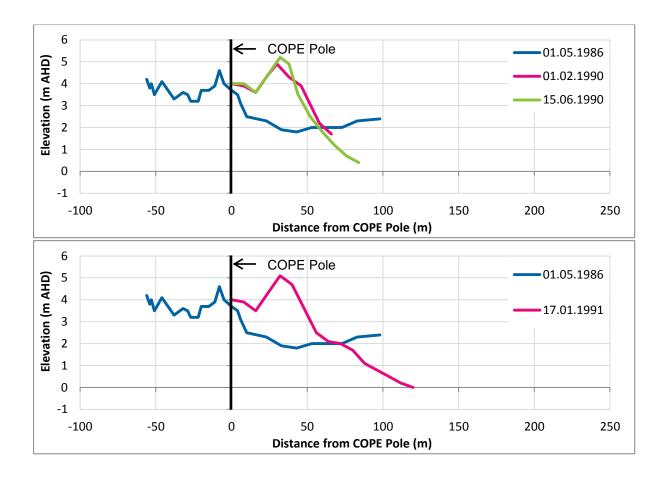




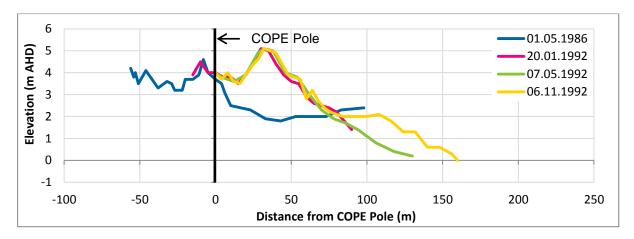

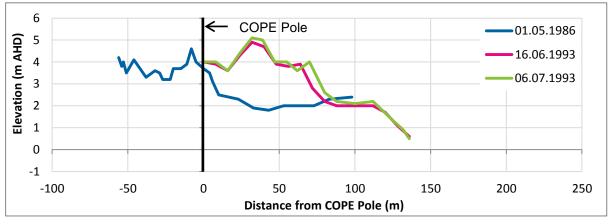




Job Number | 41-27255 Revision | A Date | 21 Jan 2014

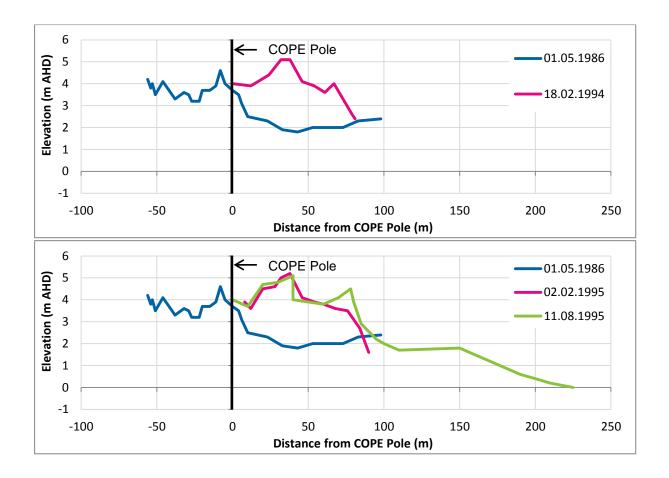




| Number | 41-27255 | Revision | A | 21 Jan 2014

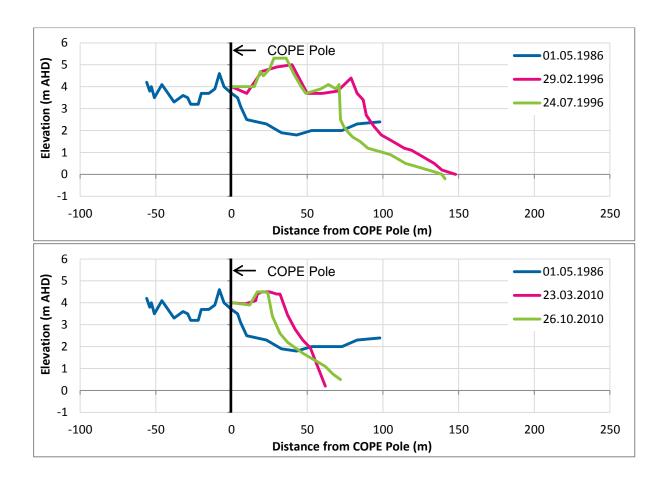



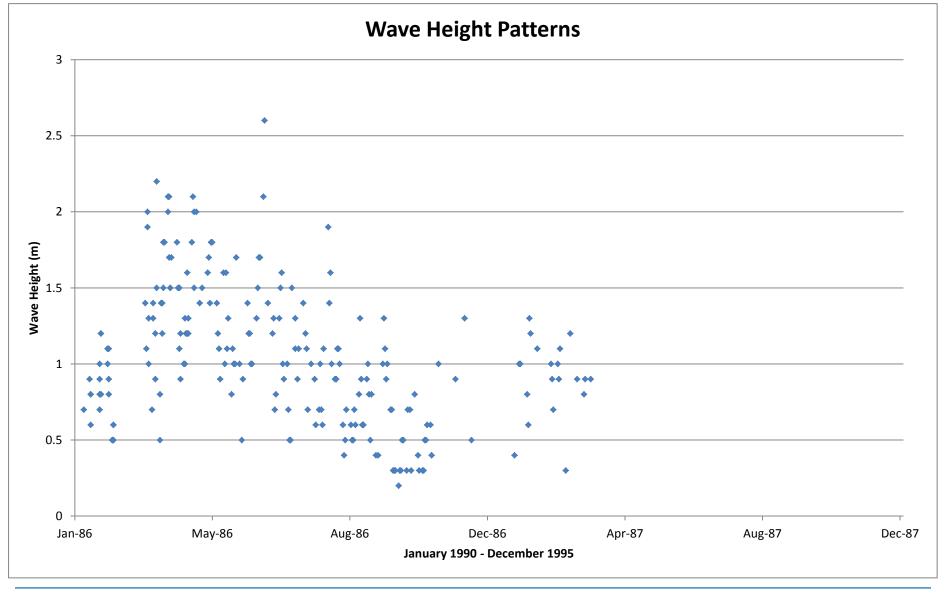




Wave Heights and Cyclone Influence

 Job Number
 41-27255

 Revision
 A

 Date
 23 Jan 2014

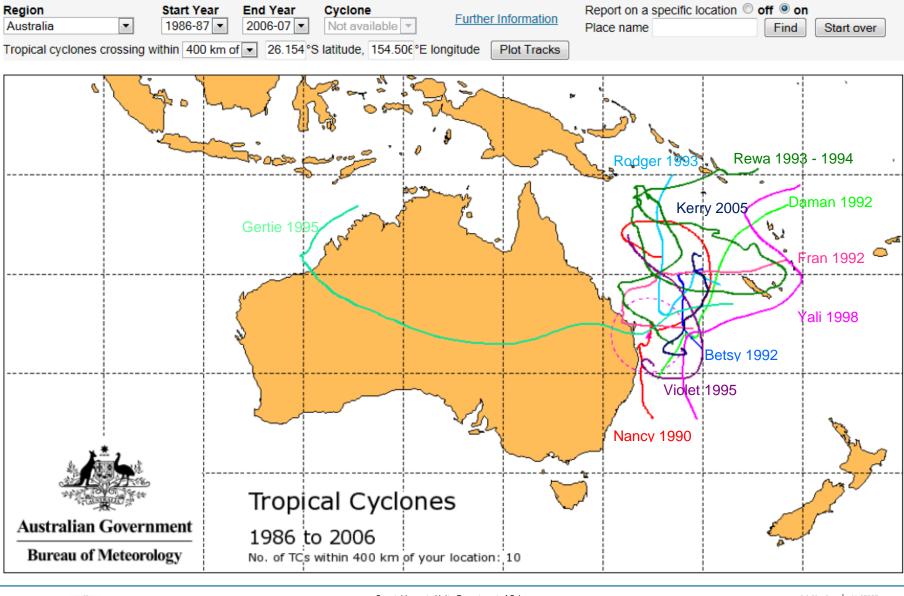



Cyclone Tracks January 1986 – December 1987

Amendments to Data:

No amendments were made to the data.

Note: Surf zone widths (m) were recorded as the time (s) it takes for an average wave to transgress the surf zone. Using the following equation from Patterson & Blair 1983, the value was converted into metres:

$$Surf\ Zone\ Width\ (metres) = 0.86 \times g^{\frac{1}{2}} \times H_{obs}^{\frac{1}{2}} \times t_w$$

where:

 $g = acceleration due to gravity = 9.81m/s^2$

 $H_{obs} = observed wave height (m)$

 $t_w = elapsed$ time for a wave of average height to transgress the surf zone from the break point to the final runup position on the beach (s)

Where a correction to the surf zone width was required, a value was estimated by using a surf zone parameter for a wave with a similar height and period. This value was then converted from seconds to metres using the above formula.

Appendix A - COPE Instructions

The following text is an extract from BPA newsletter – Beach Conservation No. 69 in which the COPE program was the feature article. The extract describes how the recordings were performed for the **new format** recording sheet, which was introduced in March 1986.

OBSERVATIONS

The data is recorded on special forms which are suitable for computer processing. An example is shown in Figure 2. The wave parameters recorded are:

- estimate of wave heights (average and maximum);
- (ii) wave period (average time interval between waves);
- (iii) wave direction (as a compass bearing);
- (iv) surf zone width (traverse time of surf zone by average wave).

The beach parameters recorded, using the installed reference pole are:

- elevation of the fixed contour or beach berm:
- distance to the fixed contour or beach berm;
- (iii) distance to the average vegetation line:
- (iv) sand level at the pole.

Wind speed and compass direction are determined by the use of a hand held wind meter.

The longshore current in the surf zone causes the transportation of sand along the beach, and it is important that this current is measured. This is done by introducing a harmless dye into the water and measuring the distance that the dye patch travels along the beach in one minute. Wave action soon dissipates the dye.

The survey of a monthly beach profile, using the installed reference pole, provides information on beach movements. During periods of change, such as cyclonic wave attack, profiles are usually taken before and after the event. All reference poles are surveyed at the time of installation to allow replacement in the same position if they are destroyed or are washed out by erosion.

The average sand grain size is an element to be considered in the assessment of longshore sand transport rates. Therefore, a monthly sample is taken from a specified beach level and analysed to reveal any seasonal or long term changes.

The following document details the instructions on how to fill out the **old format** recording sheet which was discontinued in March 1986.

FORM No. BE3



BEACH PROTECTION AUTHORITY - QUEENSLAND

Instructions for filling out COPE recording form

COASTAL OBSERVATION PROGRAMME - ENGINEERING (COPE)

STATION IDENTIFICATION:

Each site for COPE has been assigned a numerical code consisting of five digits. The first two digits define the Shire or City in which the site is located, and the remaining three digits define the particular beach and reference mark position within a particular Local Authority area. A space is provided to write in the name of the beach at which the observation is made.

DATE:

Record the year, month and day in the spaces provided on each page of the recording sheet.

TIME: (Column 2)

Record the time to the nearest quarter-hour in Eastern Standard Time (E.S.T.) at which the observation is made. (e.g. 10.00 a.m. Daylight Saving Time is 0900 E.S.T.). The 24-hour clock system of recording time is used to avoid any confusion between a.m. and p.m. (e.g. 0900 is 9.00 a.m. and 1500 is 3.00 p.m.).


Daily observations should be made as close as possible to 0900 hours, and twice-daily observations should be made once in the morning and once in the afternoon and as close as possible to 0900 and 1500 hours. Observations should be made at the same time every day.

WAVE OBSERVATIONS:

(These observations are to be made twice daily.)

- (a) Wave Period: (Column 3). Record the time in seconds for eleven wave "crests" to pass a stationary point. Eleven "crests" will include ten complete waves (crests and trough). Crest 1 is zero-time, crest 11 is cut time.
- (b) Wave Height: (Column 4). This observation is based solely on the judgement of the observer. The observer's best estimate will be sufficient. Record the breaking wave height to the nearest one-fifth metre. If wave height is less than one-fifth metre (0.2), the wave height is "O". If no waves exist at all, mark "O" for both WAVE HEIGHT and WAVE PERIOD columns.

Fig. 1 WAVE DIRECTION CODE



(c) Wave Direction: (Column 5). Darken the space which best describes the direction of the approaching waves according to Fig. 1 above. If no waves exist at all, write the direction as "O". (d) Type of Breaking Waves: (Column 6). If no waves exist, leave the item blank, otherwise choose only ONE of the following four types of waves:


Spilling — Spilling occurs when the wave crest becomes unstable at the top and the crest flows down the front face of the wave, producing an irregular, foamy water surface. This wave is sometimes referred to as a "roller" (see Fig. 2 below). Mark "SP" for spilling.

Plunging — Plunging occurs when the wave crest curls over the front face of the wave and falls into the base of the wave, producing a high splash and much foam. This wave is sometimes referred to as a "dumper" (see Fig. 3 below). Mark "PL" for plunging.

Plunging/Spilling — Darken this space only when there is a combination of spilling and plunging waves. Mark "PS" for plunging/spilling.

Surging — Surging occurs when the wave crest remains unbroken while the base of the front of the wave advances up the beach (see Fig. 4 below). Mark "S" for surging.

- (e) Surf Zone Width: (Column 7). This observation is based on the judgement of the observer. The observer's best estimate is sufficient. Record the distance, to the nearest whole metre, from the water line at the time of observation to the line of the most seaward row of breakers, at the time of observation. If no waves exist at all, mark "O". If two or more breaker zones exist, record the distance to the most seaward row of breakers of the most seaward breaker zone.
- (f) Offshore Bar: (Column 8). Record whether or not a significant offshore bar exists. This may be determined as "yes" if there is a distinct gutter between the initial breakpoint and the beach, allowing the wave to reform; and "no" if the wave continues in a broken state from the initial breakpoint to the beach (see Fig. 5).

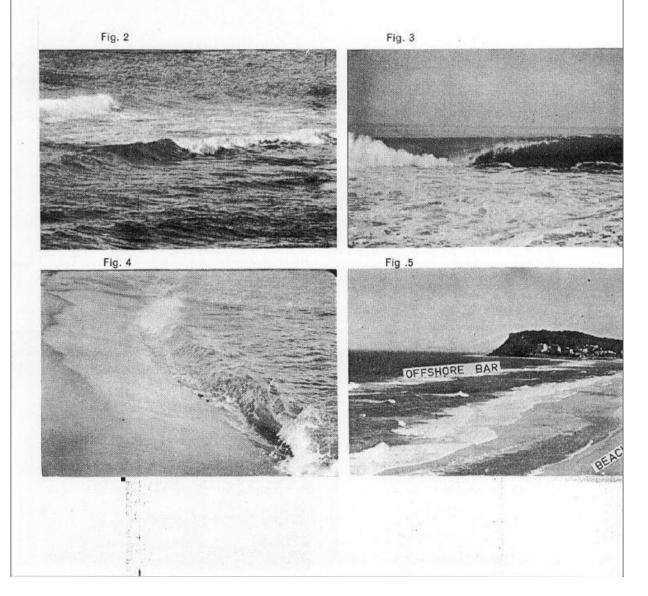

WIND OBSERVATIONS: (These observations are to be made twice daily).


- (a) Wind Velocity: (Column 9). A wind meter is provided for each observer. The instructions provided with the meter should be followed to obtain wind velocity measurements.
- (b) Wind Direction: (Column 10). Determine the orientation of the beach with respect to the compass directions, and record the direction from which the wind is coming. The direction of true north should be indicated on the reference mark or nearby.

STATE OF TIDE: (Column 11). (This observation is to be made twice daily).

Indicate the relative state of tide by marking one of the ranges: low tide "O/4", quarter tide "1/4", half tide "2/4", three-quarter tide "3/4", full tide "4/4", and mark whether the tide is rising "R", falling "F", or stationary "S" at the time of observation.

BEACH OBSERVATIONS: (These observations are to be made once daily.)

- (a) Elevation of the most seaward beach berm crest: (Column 12). To obtain this, a graduated reference pole has been installed on the beach and the observer has been provided with a hand level. The observer should also have a 1.5 m-long support for the level. To use the Clinometer as a level, set the bubble lever to zero and sight through the instrument to the reference pole so that the bubble is centred on the cross hair. To obtain this measurement, the observer must place himself on the most seaward berm crest and take a reading of the reference pole (see Fig. 6 below). This reading minus 1.5 metres (length of support) is recorded on the form. If no berm can be easily recognised mark "NB" for no berm.
- (b) Distance to the most seaward berm crest from the reference pole: (Column 13). Record the distance (to the nearest whole metre) between where the level reading is taken and the reference pole (see Fig. 6 below). If no berm exists, leave the distance blank: DO NOT mark the "O". If the distance is measured landward from the reference pole, the distance is a minus value. After erosion the berm may be at the erosion scarp.
- (c) Distance to the vegetation line from the reference pole: (Column 14). Record the distance to the nearest whole metre between the reference pole and a line along the average seaward extent of the existing perennial vegetation. If the distance is measured landward from the reference pole, the distance is a minus value.
- (d) Angle of Foreshore Slope: (Column 15). This observation can be made by placing the support pole for the level on the foreshore slope and laying the level on the support, as shown in Fig. 7 below. The foreshore is the uniform sloped section of the beach between H.W.M. and L.W.M. Next, adjust the bubble level so as to centre the bubble in the bubble tube, and then note reading on the DEGREE scale.

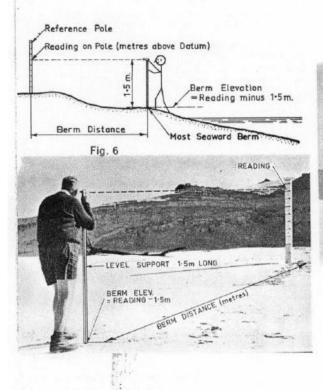



Continued overleaf

LITTORAL CURRENT OBSERVATIONS: (These observations are to be made once daily.)

- (a) Current Velocity: (Column 16). For this measurement the observer is provided with dye. The dye is very powerful, and care must be observed when handling it so as not to allow any dye to accidentally spill. The dye should be thrown as near as possible to the midpoint of the surf zone. The observer will note the position of the dye at entry to the breaker zone and the position of the dye after an elapsed time of one minute. The distance between these two positions is entered in the spaces provided on the form. If no current is evident, darken the "O" marks.
- (b) Current Direction: (Column 17). If no current is evident, mark "C" for "calm". Otherwise indicate whether the dye patch moves downcoast or upcoast. In general, current that flows to the north is considered upcoast, and that which flows to the south is considered downcoast.

SAND SAMPLES:

Sand samples should be collected once a month in the special plastic bags provided. The sample should be obtained from the foreshore slope of the beach at about half tide level. Identify the sample with the name and code number of the beach, and record the date and time the sample was collected. Write this information directly on the outside of the specially provided padded envelope.

PHOTOGRAPHS: (Optional)

Photographs are to be taken once a month, preferably early each month and at low tide. General panoramic views of the beach in the up and down coast directions are desired. Photographs should be taken from the same location each time and view the same area with a recognisable landmark in the background. Each photo must be identified with the name and code number of the beach, and the date and time and tide level when it was taken.

COMMENTS:

Note any remarks or sketches or unusual events (e.g. erosion scarps, cyclone damage, surge etc.) in the comments column of the recording form.

Remember: There are about 50 COPE stations in Queensland.

Remember: To mark all recording sheets, sand samples and photographs with

your code number, and time and date.



Issued by

BEACH PROTECTION AUTHORITY OF QUEENSLAND

Department of Harbours and Marine Edward Street, Brisbane 4000 (G.P.O. Box 2195, Brisbane 4001)